

## CLUC-48R

### Compact Undercounter Refrigerator Self-Contained Glass Doors



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

### STANDARD PRODUCT FEATURES

- Self-Contained Rear-Mounted Refrigeration System Using R-290 Refrigerant
- High Quality Stainless Steel Construction
- Anodized Aluminum Interior
- Stay Open Door Feature at 105°
- LED Display Control for Accuracy and Easy Monitoring
- Capillary Tube Metering Device
- Maintains Cabinet Temperature of 32°F to 41°F
- Two (2) Adjustable, Heavy Duty Epoxy Coated Shelves Per Section
- Field Reversible Door(s)
- Set of Four (4) 4" H Casters, Front Two w/ Locks, Pre-installed on Device
- Gasket-Protecting Retainer
- High-Density, Non-CFC Foamed In Place Polyurethane Insulation
- Easy to Grip Metal Door Handle(s)

### ACCESSORIES & OPTIONS (Available at Extra Cost)

- + Additional Epoxy Coated Shelves on Pilasters
- + Set of Four (4) 6" High Legs
- + Set of Four (4) 6" High Casters
- + Set of Four (4) 2-3/4" High Casters

### AVAILABLE CONFIGURATIONS

#### MODELS

CLUC-48R-GD-LR

CLUC-48R-GD-RR

CLUC-48R-GD-LL

#### HINGING

Glass Doors, Left/Right

Glass Doors, Right/Right

Glass Doors, Left/Left



| Model       | Doors | Shelves | Dimensions<br>L x D x H (in.) | Voltage  | Amps | NEMA    | Cu. Ft. |
|-------------|-------|---------|-------------------------------|----------|------|---------|---------|
| CLUC-48R-GD | 2     | 4       | 48.25 x 33 x 30*              | 115/60/1 | 2.6  | 5 - 15P | 13.28   |

\*Note: 30 in. height without casters


Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_

## MODEL - CLUC-48R-GD

Glass Door Models

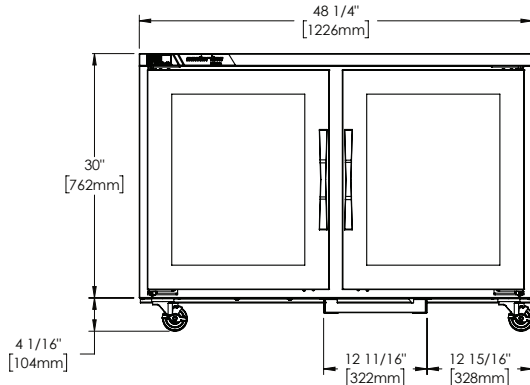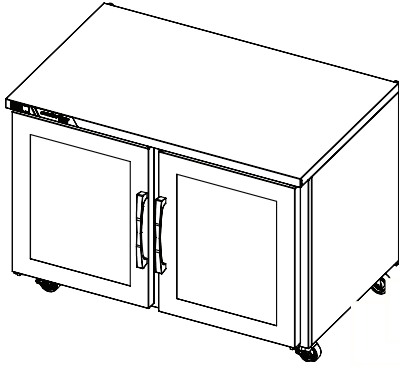

**ELEVATION**

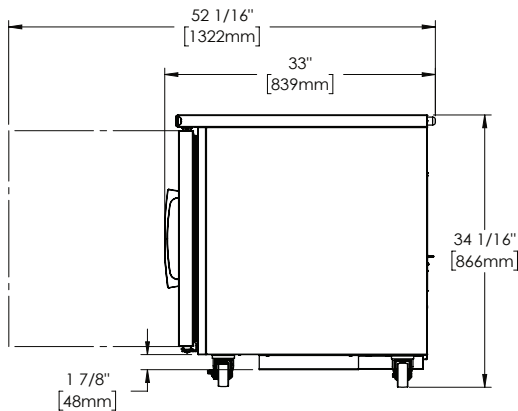

**SIDE VIEW**

## SPECIFICATIONS

### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, sides, and door frames are constructed of stainless steel and glass doors. Cabinet interior is constructed of anodized aluminum. A set of four (4) 4" high casters are included. Doors are equipped with a gasket protecting retainer. Both the cabinet and door(s) are insulated with an average of 2-3/8" thick high density, non-CFC, foamed in place polyurethane insulation.

### REFRIGERATION SYSTEM

A rear mounted, self-contained, balanced refrigeration system using environmentally friendly, low GWP R-290 refrigerant is provided. It features an easy to clean rear facing condenser, capillary tube metering device, and air-cooled hermetic compressor. A 9' cord and plug is provided. Standard operating temperature is 32°F to 41°F. Energy efficient refrigeration system maintains safe product temperatures. Condenser is located in the back of the unit for easy maintenance and zero clearance.

### CONTROLLER

The easy to use electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

### INTERIOR

Standard interior arrangements include two (2) epoxy coated wire shelves per section, mounted on pilasters. Recommended load limit per shelf should not exceed 150 lbs.

### WARRANTY

Both a 6 Year Parts & Labor Warranty and additional 1 Year on Compressor Parts Warranty are supplied standard.

| MODELS                     | CLUC-48R-GD    |
|----------------------------|----------------|
| <b>ELECTRICAL DATA</b>     |                |
| Voltage                    | 115/60/1       |
| Full Load Amperes          | 2.6            |
| <b>REFRIGERATION DATA</b>  |                |
| Refrigerant                | R-290          |
| Refrigerant Charge oz.     | 3.0 (85 g)     |
| BTU/HR   H.P. <sup>1</sup> | 1800   1/5     |
| <b>SHIPPING DATA</b>       |                |
| Depth Crated in.           | 35 (88.9 cm)   |
| Height Crated in.          | 37 (94 cm)     |
| Length Crated in.          | 53 (134.6 cm)  |
| Volume Crated cu. ft.      | 39.7 (1125 l)  |
| Net Weight lbs.            | 279 (126.6 kg) |
| Gross Weight lbs.          | 310 (140.6 kg) |

NOTES:

1. BTU/HR based on a 90°F ambient and 20°F evaporator

Equipped with one NEMA 5-15P Plug

